

STEP 4.
Hang **LIGHT(A)** on **SCREWS (E)**.

seville classics®

Adjustable Motion Activated LED Light (2-Pack)

Use Instructions

1. Slide the ON/OFF/AUTO Switch to the desired position

ON: Lights will remain on.

OFF: Lights will remain off.

AUTO: Lights will automatically turn on for approximately 18 seconds when motion is detected in a 6-to-9 foot area in front of the light.

2. Swivel the lights up to 90° for light where you need it.

Specifications

Batteries: **3 x AAA**

Brightness: **200 lumen**

Color: **7000K**

Motion Sensor Range: **6' to 9'**


Tilt Range: **90°**

Dimensions: **8.7" L x 1.81" D x .87" H**

Weight: **.22 lbs.**

Caution

- All batteries must be the same type as mentioned.
- Do not mix old and new batteries.
- Do not mix alkaline, standard, or rechargeable batteries.
- If battery contents are leaking, discontinue use and discard.
- Remove exhausted batteries.
- If you have doubts about the installation seek a qualified installer.

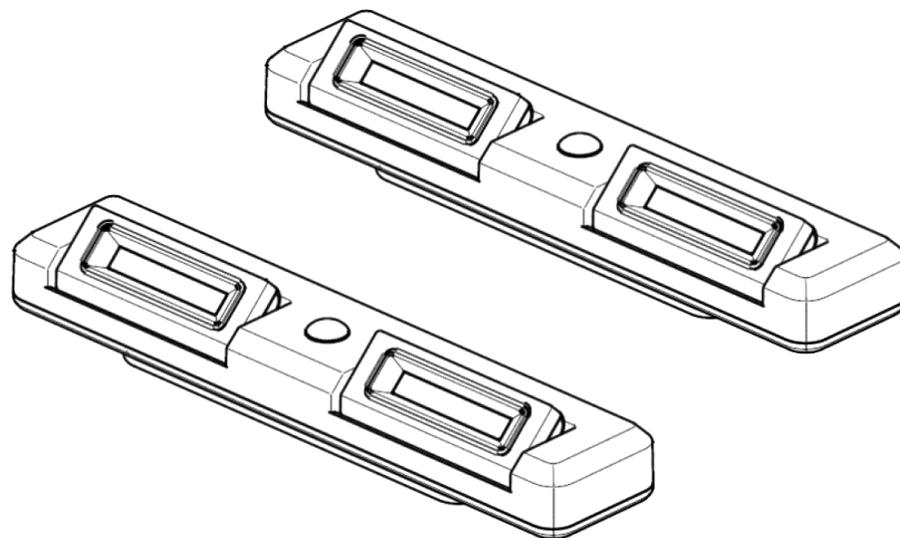

Customer Service Information

Telephone: (800) 323-5565

Fax: (310) 533-3899

Hours: 8:30 AM – 4:30 PM (PST)

Email: Support@SevilleClassics.com


Homepage: www.SevilleClassics.com

Model: WEB577


Thank you for choosing Seville Classics! We hope that you enjoy your LED lights! Please read through this user guide for parts list, instructions, frequently asked questions and further contact information.

Parts List


A. Light (2)

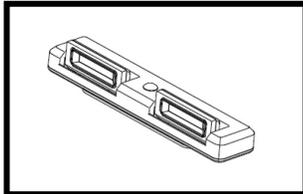


B. Bracket (2)

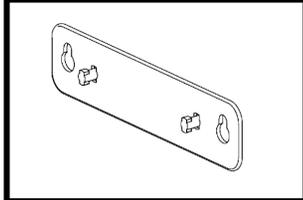


C. AA Batteries (6)

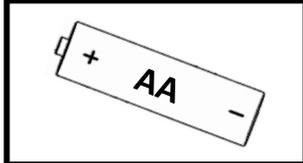

D. Anchor (4)

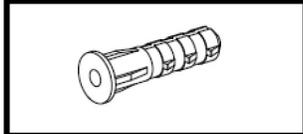

E. Screw (4)

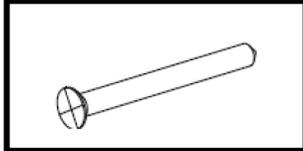

Required Tools (not included)

Screwdriver




Power drill



Please make sure you have all the parts on this list.

If you're missing parts, contact us for replacements at (800) 323-5565 or send an email to Support@SevilleClassics.com

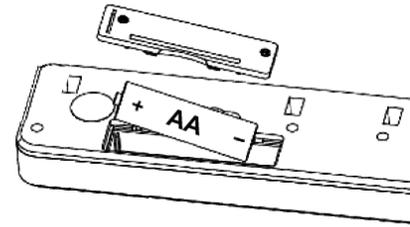


STEP 1.

Insert 3 AA batteries into **LIGHT (A)**.

Determine where you want to install the light and what kind of surface it is.


METAL WALL

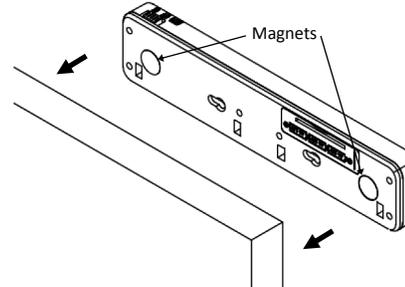

STEP 2.

For magnetic surfaces, simply stick the light against a wall.

DRYWALL & HOLLOW WALL

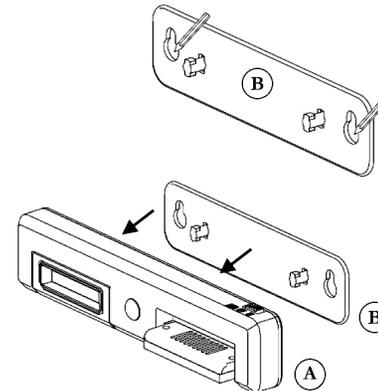

STEP 3.

Hold the **BRACKET (B)** in place and mark the holes with pencil.


Press **BRACKET (B)** onto rear of **LIGHT (A)** with narrow holes pointing upward.

Slide left to fasten.

Drill a 3/4" deep hole with a 1/16" drill bit into each mark.

Press **ANCHORS (D)** into holes and tap lightly with hammer until flush with wall. Install **SCREWS (E)** into anchors until 1/8" of the head is left exposed.

WOOD STUDS

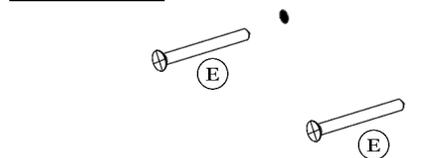

For wood studs,

Install **SCREWS (E)** into holes until 1/8" of the head is left exposed.